



Enlightening Australia Illuminated Mirrors Mounting Instructions

Congratulations on purchasing an Enlightening Australia Illuminated Mirror! These mirrors are Australian made and designed to the highest possible standards. Mounting of these mirrors is quite simple; however the electrical connection must be carried out only by suitably qualified electricians.

Overview;

The mirrors are comprised of 2 elements: the *front* mirror plate, and the mirror body (or backplate). The backplate is quite light and contains all electric components and lamps. The mirror frontplate is connected to the backplate by 4 screws: 2 at the top of the mirror and 2 at the bottom.

For Avalon illuminated mirrors in all sizes, follow these steps;

1. Ensure all electricity supply is turned off before commencing.
2. Carefully remove all cardboard and bubble wrap packaging from your mirror, but leave the plastic protective cover that is actually stuck to the mirror face itself in place until after installation. This will help prevent scratching during installation.
3. Remove the 2 screws on the top of the mirror and the 2 screws on the bottom of the mirror.
4. Carefully lift the mirror frontplate up and away from the backplate, and store safely. **DO NOT STAND MIRROR ON A HARD SURFACE AT ANY TIME!**
5. Position the backplate on the wall in the desired spot and mark the location of the 4 mounting screw holes and the central electrical cable entry hole onto the wall.
6. You have now marked the positions to drill for mounting. Select appropriate fastening screws or masonry anchors to suit your wall. (Your electrician should be able to advise the correct anchors required).
7. The wiring should now be fed through the central electrical cable hole, and the backplate secured firmly to the wall. The electrician can now connect the cable to the electrical terminal block on the backplate.
8. Reattach the mirror frontplate to the backplate using the 4 screws that were removed before installation. Note: The 4 brackets attached to the mirror frontplate that the screws screw into are all positioned *INSIDE* the body of the mirror (or backplate).
9. You can now remove the plastic protective film from the mirror glass (if present). Clean the mirror glass with a normal non-abrasive glass cleaner. Reconnect the power supply.


Operation of the touch Dimmer (off/on switch)

The touch dimmer off/on switch is located centrally at the bottom of the mirror.
Push and hold this button to dim or brighten the light. Release at desired light level.
Push and release this button quickly to turn the light off or on.


Lamp Changes

In order to replace the lamps, simply follow steps 3 & 4 above to gain access to remove the old lamps and install the new lamps. Follow step 8 above to complete lamp change.


To ensure that you retain the brilliant colour qualities of the lamps, replace with T5 fluorescent tubes only.

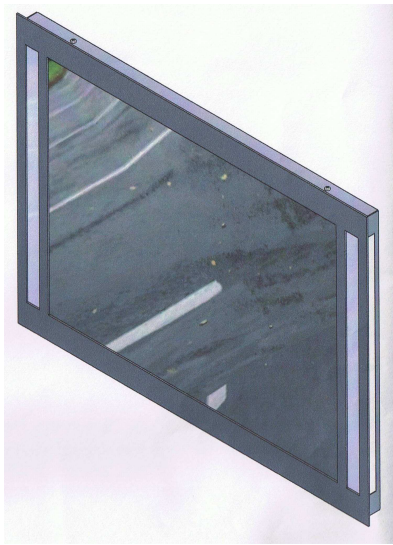

Mirror Frontplate attached

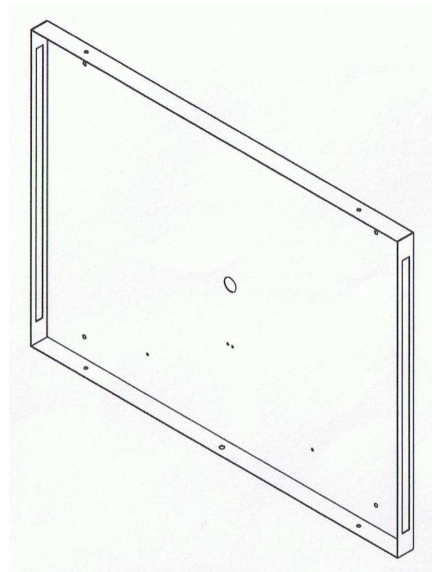

Mirror Body Backplate

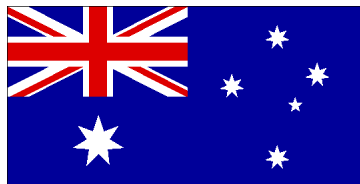

*Proudly Australian made and owned.
These products help support people with disabilities*